
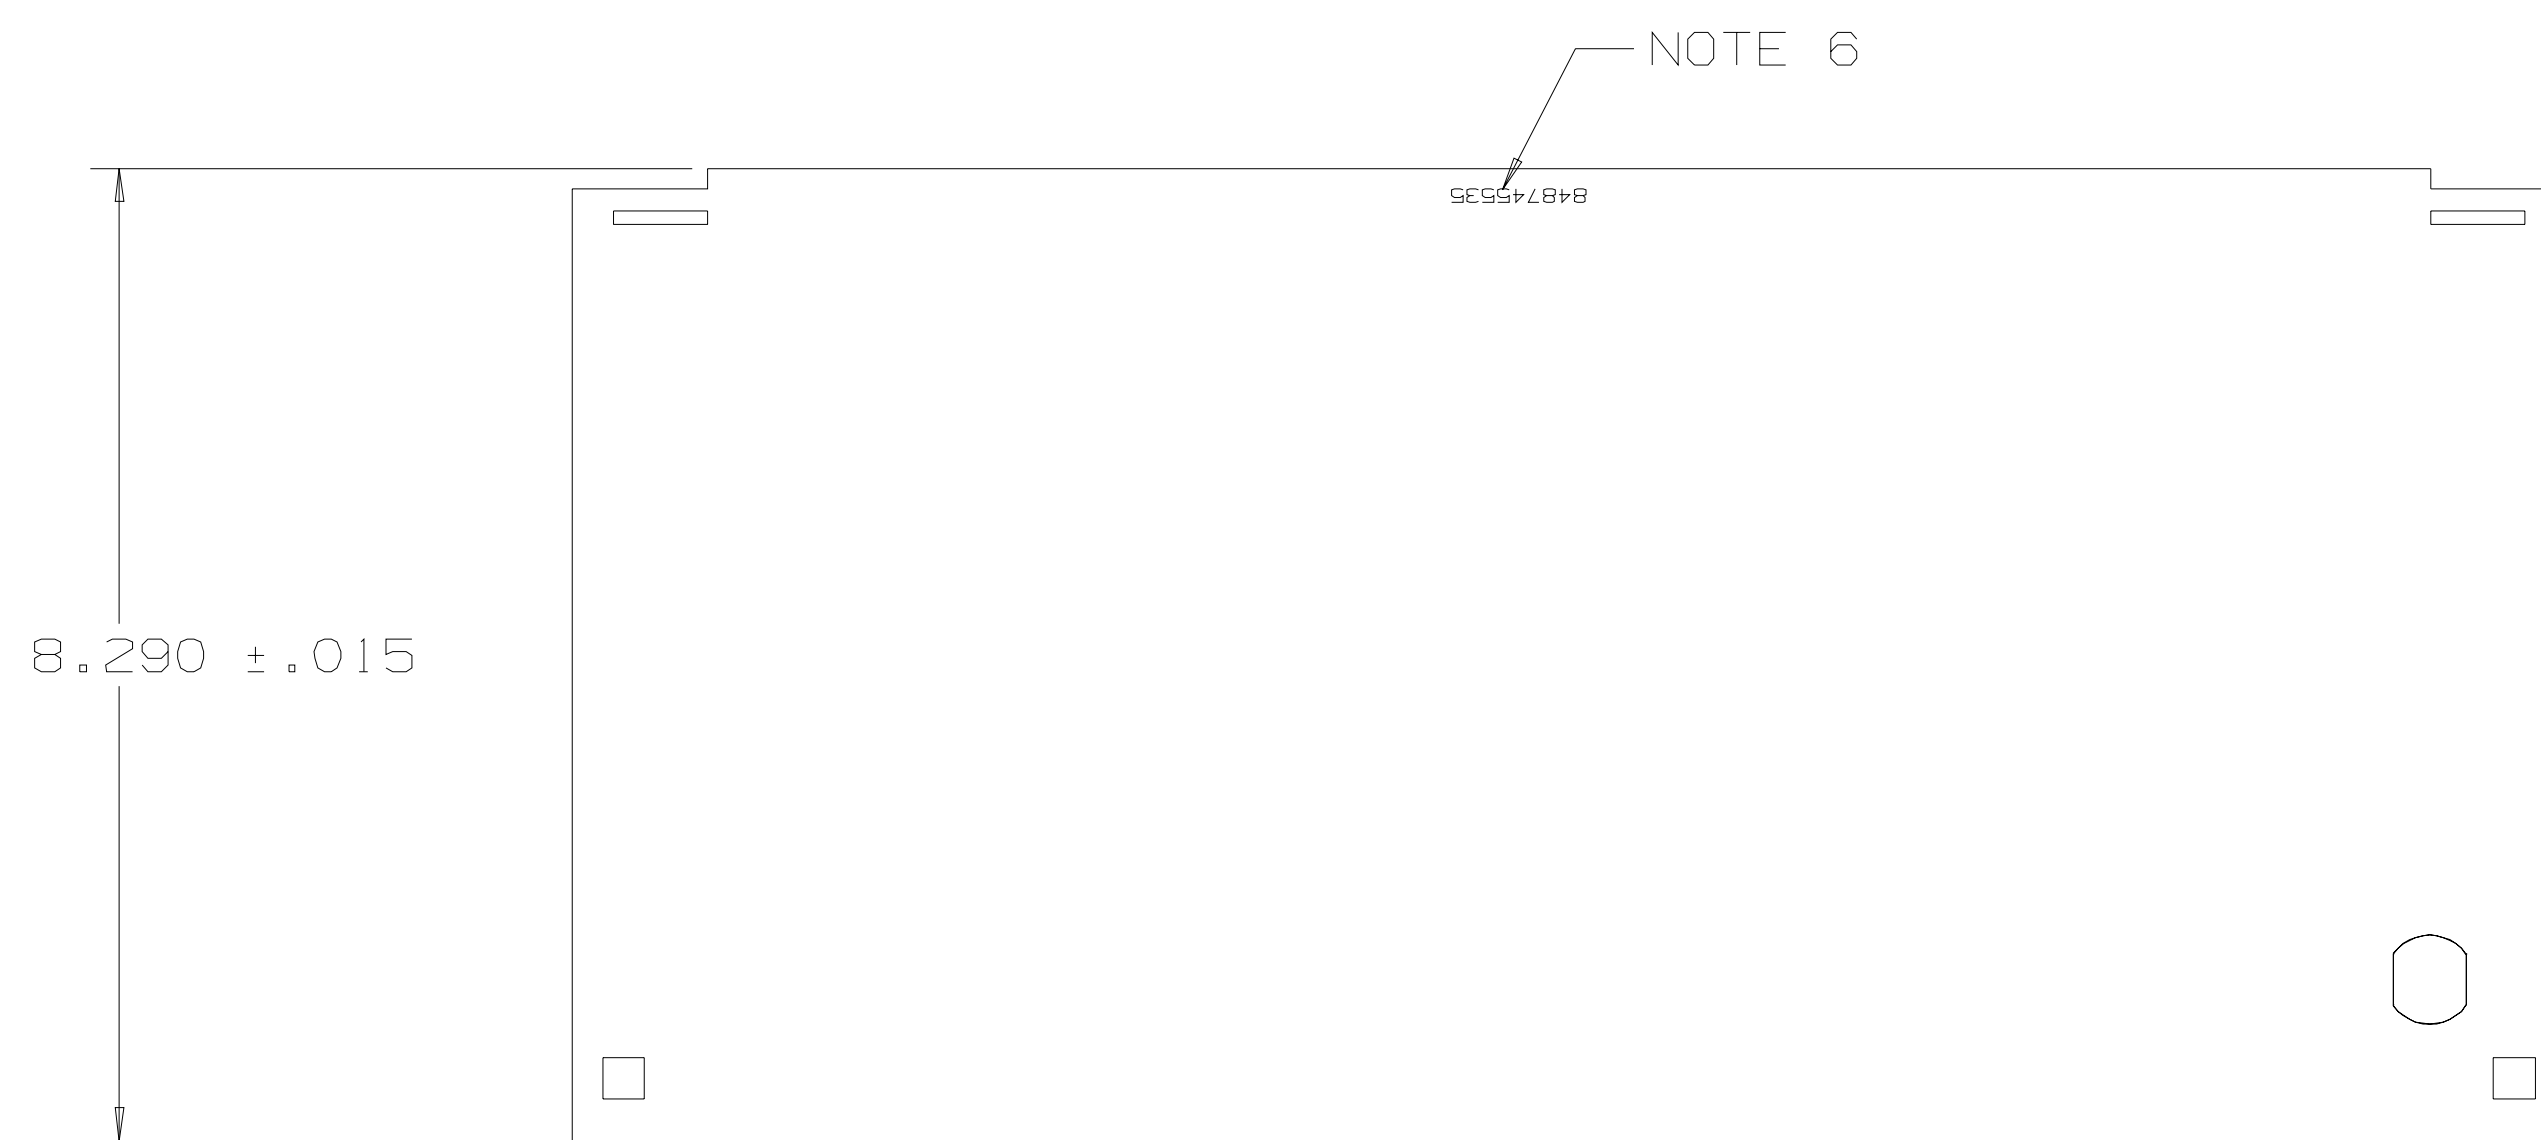


848745535

ENGR	R.D. BEGGS	RDB	CLS
DRAWN	R.W. HAMMOND	RWH	JMA
1-26-01		ISSUE 1	

NOTES:

1. THE GEOMETRY OF THIS PART HAS BEEN CREATED USING UNIGRAPHICS AND IS STORED IN THE ATLANTA UNIGRAPHICS VAULT.
2. DEBURR AND REMOVE ALL SHARP EDGES.
3. FINISH: PAINT #827 CENTRAL OFFICE WHITE, SMOOTH FINISH, BAKED, SPEC #WL-2355 (.004 THK.).
4. THE KNOCKOUTS SHALL BE SHEARED TO A DEPTH SUFFICIENT TO PERMIT THEIR REMOVAL WITH MINIMUM DAMAGE TO THE ADJACENT METAL. THEY SHALL BE HELD IN PLACE WITH SUFFICIENT SECURITY TO PREVENT THEIR LOOSENING IN HANDLING. THE RETAINING TABS SHALL BE SHEARED SO THAT NONE OF THE TAB METAL PROJECTS INTO THE HOLES.
5. CHARACTERS SHALL BE PAD PRINTED, SILK SCREENED, OR IMPRINTED USING TRANSFER FOIL. MARKING IS TO BE WHITE AND PERMANENT. MARK DOOR FRONT WITH LUCENT TECHNOLOGIES BRAND-MARK AS SPECIFIED IN PMRI CONFIGURATION 5. SIZE CONFIGURATION SO THAT LOGOTYPE CAPITAL HEIGHT IS 6mm (.23") AND IS CENTERED ON .531 DIMENSION.
6. INK STAMP, APPLY LABEL, OR EMBOSS TO SHOW COMCODE (DRAWING) NUMBER IN .12" HIGH CHARACTERS. INK STAMP OR LABEL WITH BLACK PERMANENT INK. LABEL BACKGROUND TO BE WHITE OR CLEAR. IF EMBOSSING, DO SO BEFORE APPLYING FINISH.
7. SURFACE MUST BE FLAT WITHIN ±.030".

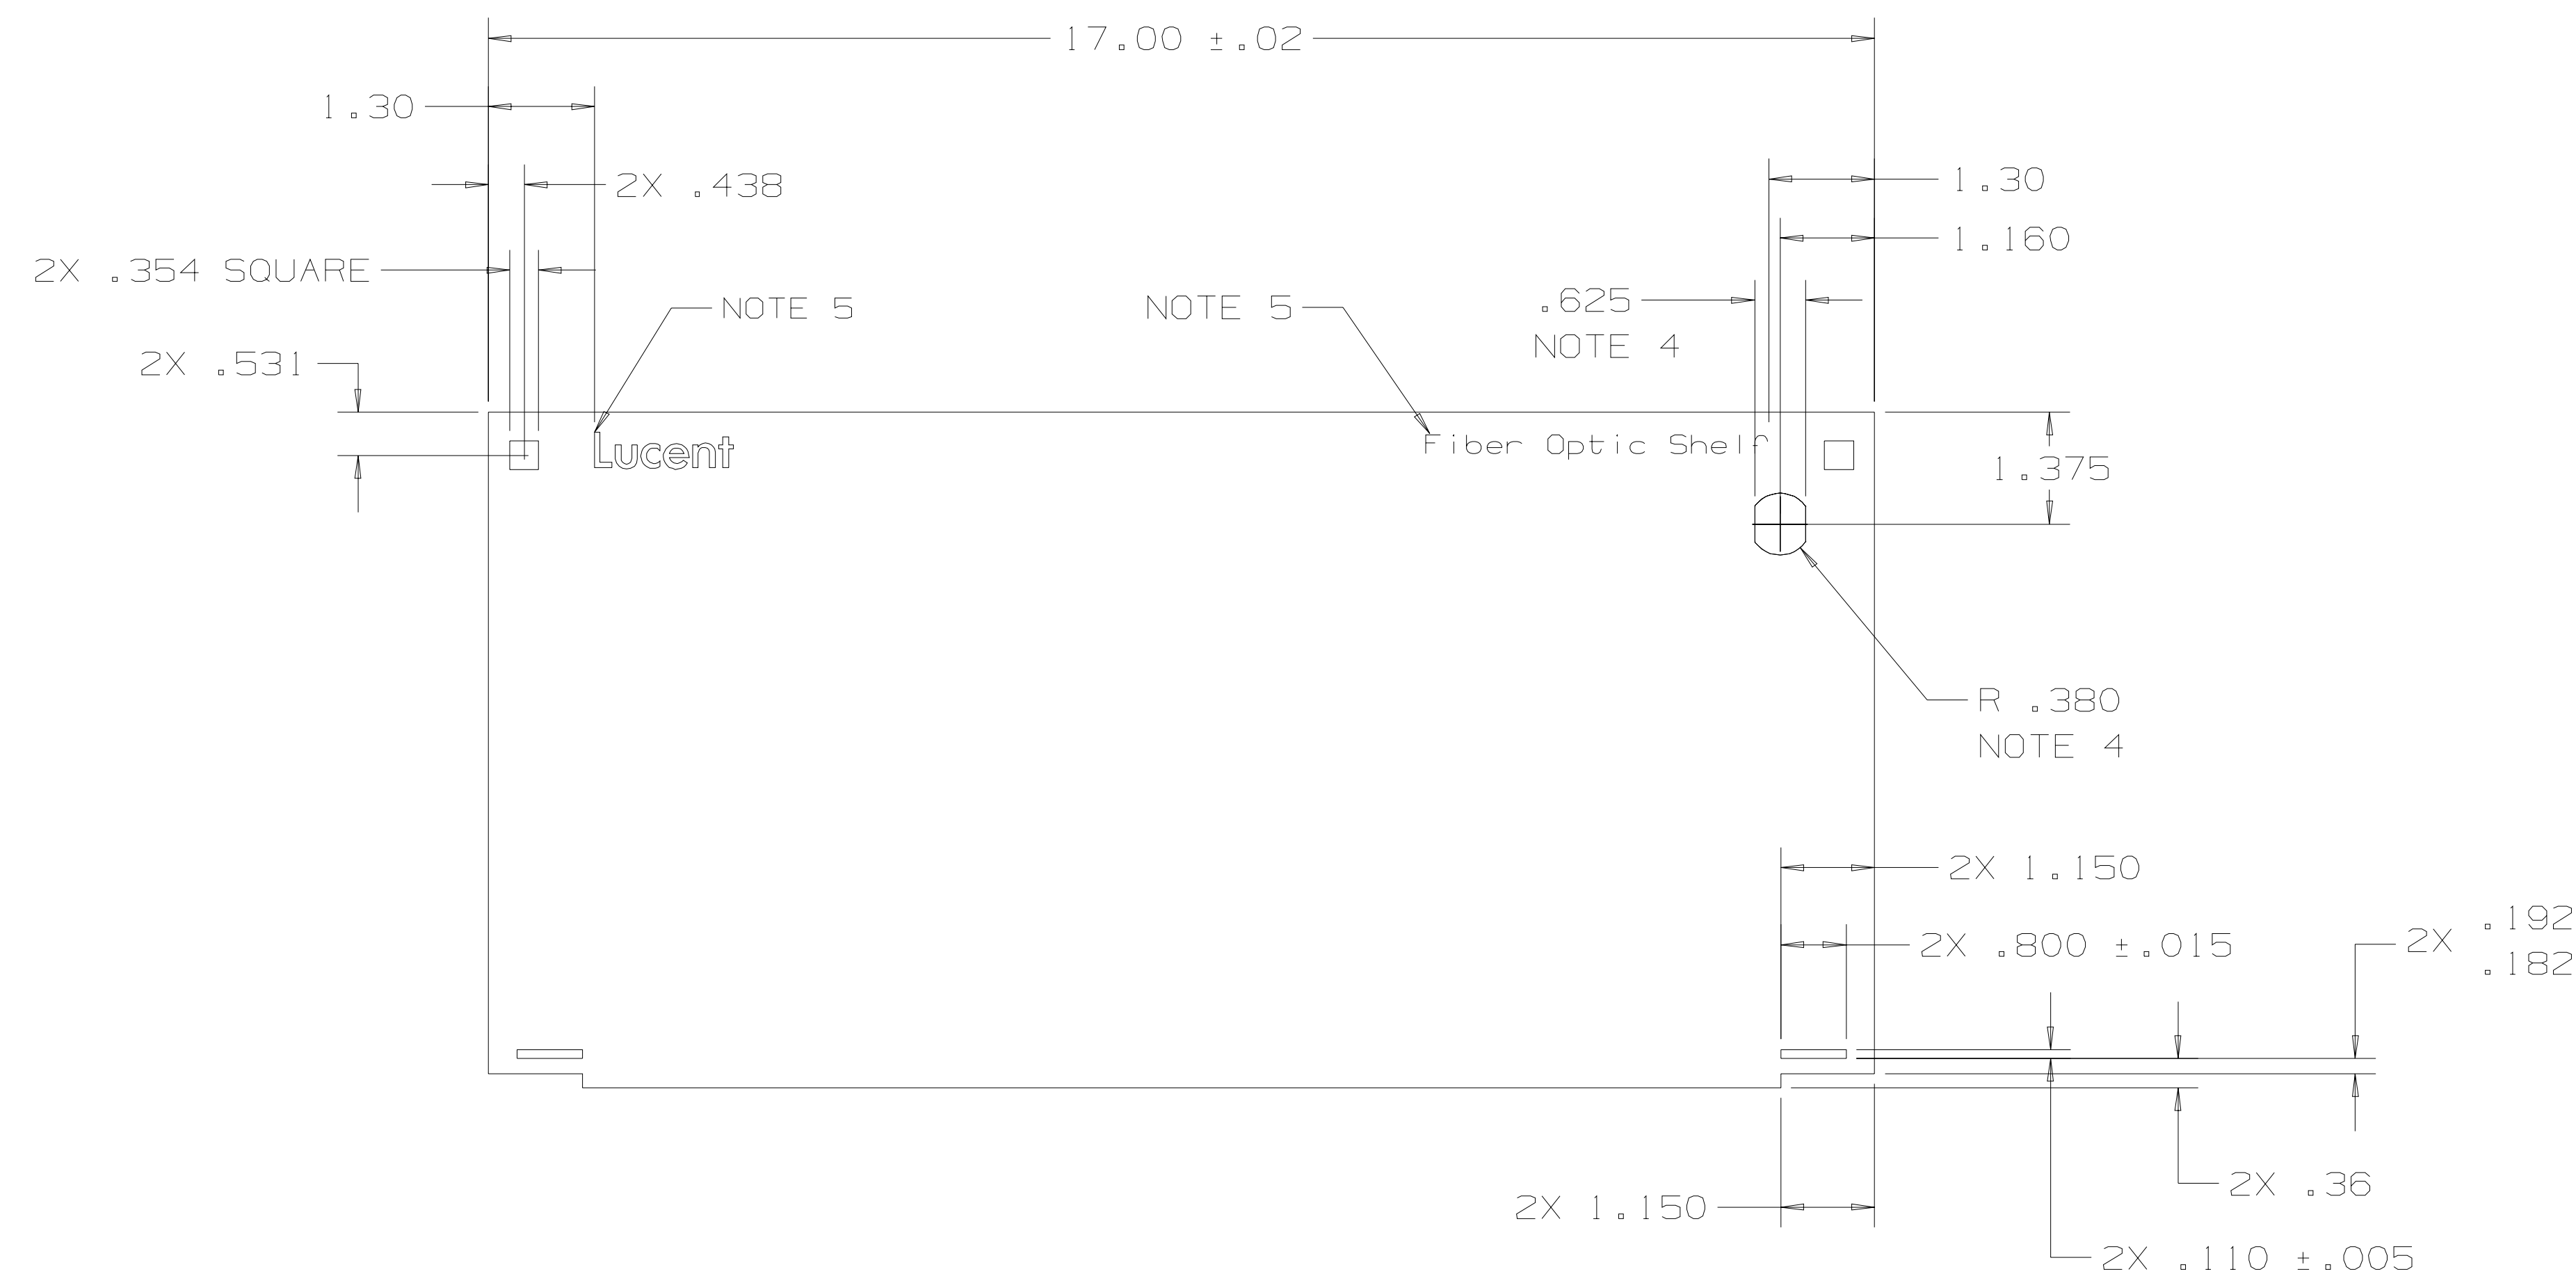

9A DOOR	A01AK1043
USED ON	DRAWING

Lucent Technologies
 PROPRIETARY
 Use pursuant to
 Company Instructions

APPARATUS - EQUIPMENT

DOOR,
 FRONT 9"

SCALE 1/2

DWG
 SIZE
 65

848745535

MATERIAL ALUM, 3003-H14, .100 THK	FINISH NOTE 3
UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. NONLIMITED DIMENSIONS OTHER THAN SIZE OF RAW MATERIAL SHALL BE HELD AS FOLLOWS WHEN EXPRESSED: TO 2 DECIMAL PLACES ± AS ANGLES ± TO 3 DECIMAL PLACES ±	
THIS ENGLISH DRAWING HAS BEEN PREPARED IN ACCORDANCE WITH ANSI Y14.5M - 1982. DIMENSIONS SHOWN IN BRACKETS () ARE MILLIMETERS AND FOR REFERENCE.	