


Connector Cover Removal Instructions for Outdoor Bundle Assemblies

1. Free the Connector Cover Assembly from the bundle coil.



2. Using pliers, grab one side of the Hose Clamp latching feature.

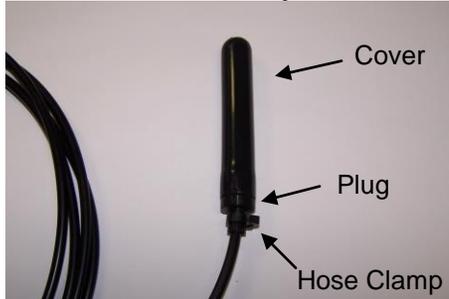

3. Grab the other side of the Hose Clamp latching feature and pull the latches laterally apart, to release the Hose Clamp. Remove the Hose Clamp from the cable.



4. Carefully remove the Cover by pulling it away from the Plug. Rock the Cover back and forth to ease removal.



5. Cut a longitudinal slit down the entire length of the Plug, on one side, using scissors. Be careful not to cut the cable jacket.



6. Remove the Plug from the cable.

