

# Operating and Care Instructions

## InvisiLight Extender Pole



These instructions are for the OFS InvisiLight Extender Pole, which allows the OFS adhesive applicator to dispense adhesive at heights inside a home or living unit without the use of a ladder. Minimizing the use of a ladder is intended to reduce the total time required to install the InvisiLight Solution in a residence. The length of the pole can be adjusted between 39 and 72 inches, allowing for multiple, or varying working heights to be reached, by the same installer.

The pole extends by twisting the two sections counter clockwise, sliding the white pole out or into the red pole section to the desired working length. It is then tighten by twisting the poles clock wise to fix the length.


**Warning: Do not over tighten the pole as permanent damage can be done to the assembly by over tightening**

### First use:

Move one of the cable retaining straps from the red section of the pole, to the white pole section.

### Installing the Adhesive Applicator

Align the applicator on the top surface and on the right edge of the Extender Pole back plate. The handle should be flat against the back plate. Loop the upper retaining straps over the top of the applicator and tighten. Loop the lower retaining straps around the handle of the adhesive applicator. The tighter the straps the more effective the trigger activation.

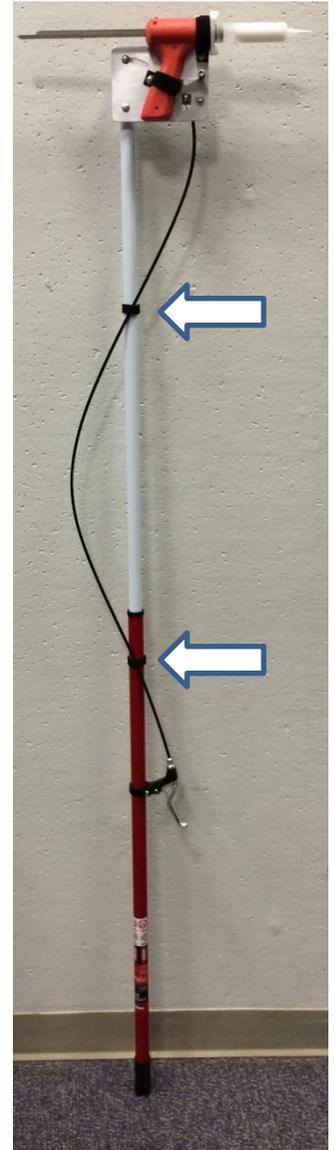

# Operating and Care Instructions


## InvisiLight Extender Pole

### Before Each Use

After setting the pole to the desired length, check that the “trigger bolt” is near the end of slot in the back plate, allowing the maximum travel with each pull of the hand lever (see picture below). This can be done by adjusting the cable tension adapter and locking nut on the hand lever. As a general rule: when the pole is shorter, screw the adjuster into the handle and when the pole is longer, screw the adjuster out of the lever handle.



Adjust cable tension to max trigger travel

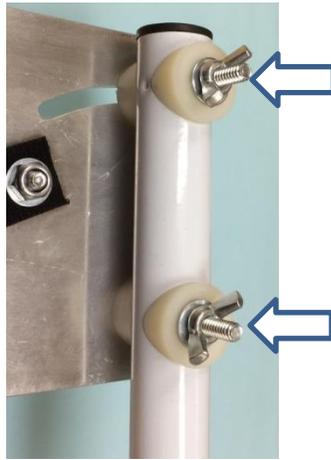

Adjust tool angle with wing nuts



Option: Flashlight added to increase visibility

The head of the extender pole may be angled to ease installation or per the preference of the installer. Loosen the wing nuts on the rear of the pole attachment bolts and adjust the back plate angle as desired (see picture above). Tighten the wing nuts to keep the back plate and or the adhesive applicator at the desired angle.

### Optional Flashlight

A small flashlight may be added to the applicator straps to improve visibility using an additional hook and loop strap.

### Every 3 months

Add a drop of oil to the trigger arm pivot bolt every 3 months to maintain smooth operation.

### Every 6 months

Check the cable for wear. Check all bolts for tightness.