


EZ!Fuse™ Splice On Connector

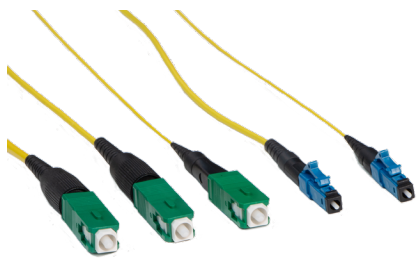

Features and Benefits

- Simple, Fast, & Consistent Field Termination:**
 Allows for easy field installation of EZ-Bend cables, pre-terminated splitters, fan outs, and drop terminals.
- No Polishing or Epoxy:**
 OFS's connector termination process requires no polishing or epoxy increasing the quality and consistency of field connector termination. Total installation time is greatly reduced compared to traditional methods.
- Fiber Management:**
 The most difficult task for splicer operators has always been managing the fiber upon completion of splicing. The connector termination feature eliminates the need for splice trays resulting in easier fiber management, reduced storage requirements, and faster installation times.

Product Description

OFS's new Splice On Connector termination system allows for easy termination and flexibility in the field. The "splice-on" connector (SOC) eliminates the need for field polishing and significantly improves the quality of the termination and installation time required. The connector is easily assembled by using a process that requires minimal skill or training. These connectors are optimal for use in FTTx application. Both UPC and APC polishing are available for single-mode fiber.

EZ!Fuse Splice On Connector is compatible with the FITEL Fusion Splicers models Ninja, S179, S178 and the EZ-Terminator™.



Ninja NJ001 Fusion Splicer



S179A Fusion Splicer



S178A / S153A / S123C
Fusion Splicer



EZ-Terminator
Termination Tool

For additional information please contact your sales representative.

You can also visit our website at www.ofsoptics.com or call **1-888-fiberhelp** (1-888-342-3743) USA or **1-770-798-5555** outside the USA.

Fusion Splicer Customer Service, Training and Service Center
Toll Free: 866-452-9516
Phone: 678-783-1090
Fax: 678-783-1093
Email: splicers@ofsoptics.com

OFS Corporate Headquarters
2000 Northeast Expressway
Norcross, Georgia 30071, USA
Toll Free: 888-Fiber-Help
Intl. Phone: 770-798-5555



Copyright © 2020 OFS Fitel, LLC.
All rights reserved, printed in USA.

OFS Marketing Communications
Doc ID: FITEL-EZIFUSE
Date: 09/20

FITEL is a registered trademark and EZ!Fuse is a trademark of Furukawa Denki Kogyo Kabushiki Kaisha

DBA Furukawa Electric Co., Ltd.

Furukawa reserves the right to make changes to the prices and product(s) described in this document at any time without notice. This document is for informational purposes only and is not intended to modify or supplement any Furukawa warranties or specifications relating to any of its products or services.

Product Characteristics

Parameter	Description
Applicable Fiber Type	250µm, 900µm, 2mm, 3mm
Connector Type	SC, LC
Polishing	UPC or APC (SM), PC (MM)
Insertion Loss Typical	0.3dB (SM), 0.1dB (MM)
Return Loss	> 60dB (SM/APC), >50dB (SM/UPC), >30dB (MM/PC)
Operating Temperature	- 40 °C to 75 °C

Ordering Information

Product code	Description	MOQ	
FSOC-SC09-SM-U	SC connector, SM UPC polishing for 250/900µm fiber	10 connectors. One S712C-SGS9C-R-P is supplied with each MOQ of 10 connectors.	
FSOC-SC23-SM-U	SC connector, SM UPC polishing for 2/3mm cordage		
FSOC-SC09-SM-A	SC connector, SM APC polishing for 250/900µm fiber		
FSOC-SC23-SM-A	SC connector, SM APC polishing for 2/3mm cordage		
FSOC-SC09-M3-P	SC connector, OM3 PC polishing for 250/900µm fiber		
FSOC-SC23-M3-P	SC connector, OM3 PC polishing for 2/3mm cordage		
FSOC-SC09-M1-P	SC connector, OM1 PC polishing for 250/900µm fiber		
FSOC-SC23-M1-P	SC connector, OM1 PC polishing for 2/3mm cordage		
FSOC-LC09-SM-U	LC connector, SM UPC polishing for 250/900µm fiber		10 connectors. One S712C-SGL9C-R-P is supplied with each MOQ of 10 connectors.
FSOC-LC20-SM-U	LC connector, SM UPC polishing for 2mm cordage		
FSOC-LC09-SM-A	LC connector, SM APC polishing for 250/900µm fiber		
FSOC-LC20-SM-A	LC connector, SM APC polishing for 2mm cordage		
FSOC-LC09-M3-P	LC connector, OM3 PC polishing for 250/900µm fiber		
FSOC-LC20-M3-P	LC connector, OM3 PC polishing for 2mm cordage		
FSOC-LC09-M1-P	LC connector, OM1 PC polishing for 250/900µm fiber		
FSOC-LC20-M1-P	LC connector, OM1 PC polishing for 2mm cordage		

Required Holders

Part Number	Description
S712C-SGS9C-R-P	SC type ferrule holder for FITEL splicer (Plastic) 1 piece is included in each MOQ 10 connectors
S712C-SGL9C-R-P	LC type ferrule holder for FITEL splicer (Plastic) 1 piece is included in each MOQ 10 connectors
S712S-250	250um coated fiber holder for FITEL splicer
S712S-900	900um coated fiber holder for FITEL splicer
S712C-FSOC1-L	Cordage holder for FITEL splicer

Related Products

Part Number	Description
EZT-01	Ring and slit tool for EZ!fuse SOC 2/3 mm SC/LC assemblies



EZT-01